





This MotoCAP safety rating applies to:

Brand Ixon
Model Buckler
Type Pants - Denim
Date purchased 23 February 2021
Sizes tested XL and 2XL


Test garment gender Male
Style All Purpose
RRP \$269.96

Test Results Summary	Rating	Score
MotoCAP Protection Rating	*	22.1
Abrasion	1/10	0.98
Burst	9/10	915
Impact	4/10	26.8
MotoCAP Breathability Rating	****	0.587
Moisture Vapour Resistance	-	25.8
Thermal Resistance	-	0.253
Water resistance	N/A	N/A

This garment is fitted with impact protectors for the knees and hips. Replacing the knee and hip armour with higher performing impact protectors would improve the protection levels of this garment. There are no vents to allow airflow movement through the garment.

Jacket and Pants - Crash Impact Risk Zones

This diagram is a pictorial representation of the crash impact risk Zones.

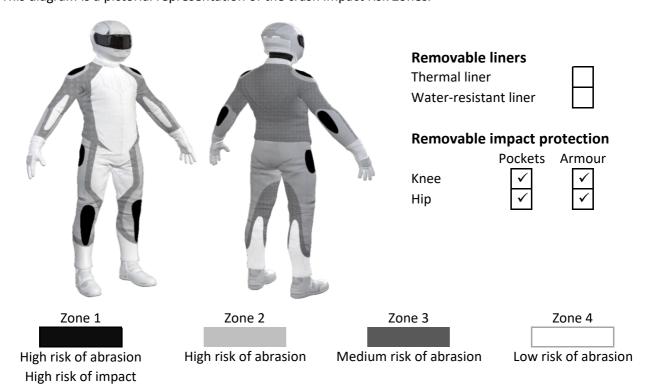



Abrasion Resistance

These pants were tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.



Abrasion Resistance Performance

Abrasion rating 1/10 Abrasion score 0.98

Determining Criteria	Area	Good	Acceptable	Marginal	Poor
High abrasion risk	Zones 1 & 2	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4	>1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

Individual Abrasion Resistance Results: - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

Abrasion time for each test (seconds)

/ IDI GOIOII IIIIIO	101 04011 1001 (001	, on a o						
Zones 1 & 2	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
Material A	100%	1.46	1.44	1.04	1.42	1.28	1.09	1.29
Zone 3	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
Material B	100%	0.64	0.46	0.59	0.41	0.75	0.29	0.52
Zone 4	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
Material B	100%	0.64	0.46	0.59	0.41	0.75	0.29	0.52

Details of materials used in jacket

Material A Denim fabric shell, p-aramid fabric layer and fabric inner liner

Material B Denim fabric shell with fabric inner liner



Burst Strength

These pants were tested for burst strength in accordance with MotoCAP test protocols. The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table below.



Burst Strength Performance

Burst rating	9/10
Burst score	915

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor
Burst strength	(kPa)	> 1000	800 - 1000	500 - 799	< 500

Individual Burst Strength Results: - The table below shows the burst pressure in kilopascals (kPA) for each sample tested by Zone and the average result for each zone.

Burst pressure for each seam (kPA)

Area	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Zones 1 & 2	594	1569	1213	283	808	1245	952	Α
Zones 3 & 4	262	734	803	699	1069	1049	769	M



Impact Protection

These pants were tested for impact protection and coverage in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximium force for each impact zone. Areas shaded black are not considered for impact protection ratings.



Impact Protection Performance
Impact rating 4/10
Impact score 26.8

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor*
Impact force	(kN)	< 15	15 - 24	25 - 30	> 30

^{*} Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

Impact Protector Results: - The table below shows the average and maximum force transmitted through each impact protector type in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone.

Impact protector type	Knee		Hip
Average force (kN)	24.6	A	32.7 P
Maximum force (kN)	26.6	M	33.5 P
Coverage of Zone 1 area	120%	<u> </u>	140%
Coverage of Zone after displacement	60%		100%

Individual Impact Protector Results: - The table below shows the test results for each strike on individual impact protectors in kilonewtons (kN) and the position of the strike. Individual strike results are capped at a maximum of 50kN.

Force transfer for each impact strike (kN)

Impact protector type	Knee			Hip		
Strike location	Centre	Mid	Edge	Centre	Mid	Edge
Impact Protector 1	24.7	25.5	25.8	31.8	32.7	32.8
Impact Protector 2	26.2	19.9	20.9	32.4	33.5	33.2
Impact Protector 3	26.0	25.6	26.6	32.8	32.3	32.7



Breathability

These pants were tested for breathability following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

Without removable lin	With water-resistant liner				
Breathability rating	***	Breat	N/A		
Breathability score 0.587		Brea	N/A		
Moisture Vapour Resist	ance - R _{et} (kPa.m²/W)	1	2	Average	
Without removable liners		25.9	25.8	25.8	
With water-resistant liner		N/A	N/A	N/A	
Thermal Resistance - R	ct (K.m²/W)	1	2	Average	
Without removable liners		0.246	0.259	0.253	
With water-resistant liner		N/A	N/A	N/A	

Water spray and rain resistance

This pants have not been advertised as water-resistant so has not been tested for water spray and rain resistance.

Assessment Details.

Brand Ixon

Model Buckler

Type Pants - Denim

Date purchased 23 February 2021

Tested by AMCAE Deakin Lin

Tested by AMCAF, Deakin University

Garment test reference P20D08
Rating first published June 2021
Rating updated 17 June 2021