



This MotoCAP safety rating applies to:

Brand Alpinestars

Model Andes V3 Drystar

Type Pants - Textile

Date purchased 12 September 2022

Sizes tested XL and 2XL

Test garment gender Male


Style All Purpose RRP \$359.99

| Test Results Summary | Rating | Score |
|------------------------------|--------|-------|
| MotoCAP Protection Rating | * | 16.7 |
| Abrasion | 1/10 | 0.66 |
| Burst | 10/10 | 1340 |
| Impact | 1/10 | 0.0 |
| MotoCAP Breathability Rating | ** | 0.342 |
| Moisture Vapour Resistance | - | 48.0 |
| Thermal Resistance | - | 0.274 |
| Water resistance | 9/10 | 1.9 |

This garment is fitted with impact protectors for the knees. Pockets are provided at the hips for fitting aftermarket impact protectors. Adding hip impact protectors would improve the protection levels of this garment. There are zipped vents in the upper legs to allow controlled airflow movement through the garment. The breathability rating is based on tests of the garment's materials when all vents are closed. The breathability of this product may be better when the vents can be opened. Breathability was measured without the removable thermal liner installed.

Jacket and Pants - Crash Impact Risk Zones

This diagram is a pictorial representation of the crash impact risk Zones.

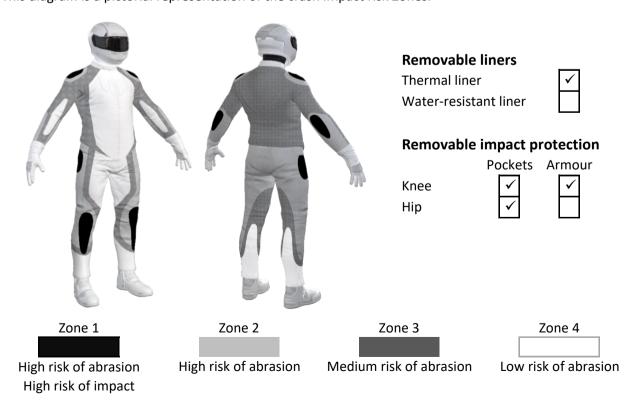



Abrasion Resistance

These pants were tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.



Abrasion Resistance Performance

| Abrasion rating | 1/10 |
|-----------------|------|
| Abrasion score | 0.66 |

| Determining Criteria | Area | Good | Acceptable | Marginal | Poor |
|-----------------------------|-------------|-------|------------|-----------|-------|
| High abrasion risk | Zones 1 & 2 | > 5.6 | 3.0 - 5.6 | 1.3 - 2.9 | < 1.3 |
| Medium abrasion risk | Zone 3 | > 2.5 | 1.8 - 2.5 | 0.8 - 1.7 | < 0.8 |
| Low abrasion risk | Zone 4 | >1.5 | 1.0 - 1.5 | 0.4 - 0.9 | < 0.4 |

Individual Abrasion Resistance Results: - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

Abrasion time for each test (seconds)

| ADIASION UNITE | ioi eacii iesi (se | conus | | | | | | |
|----------------|--------------------|----------|----------|----------|----------|----------|----------|---------|
| Zones 1 & 2 | Coverage (%) | Sample 1 | Sample 2 | Sample 3 | Sample 4 | Sample 5 | Sample 6 | Average |
| Material A | 100% | 0.62 | 0.65 | 0.70 | 0.62 | 0.68 | 0.65 | 0.66 |
| Zone 3 | Coverage (%) | Sample 1 | Sample 2 | Sample 3 | Sample 4 | Sample 5 | Sample 6 | Average |
| Material A | 100% | 0.62 | 0.65 | 0.70 | 0.62 | 0.68 | 0.65 | 0.66 |
| Zone 4 | Coverage (%) | Sample 1 | Sample 2 | Sample 3 | Sample 4 | Sample 5 | Sample 6 | Average |
| Material A | 100% | 0.62 | 0.65 | 0.70 | 0.62 | 0.68 | 0.65 | 0.66 |

Details of materials used in pant

Material A Woven fabric shell, water-resistant layer and mesh inner liner



Burst Strength

These pants were tested for burst strength in accordance with MotoCAP test protocols. The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table below.



Burst Strength Performance

Burst rating 10/10
Burst score 1340

| Determining Criteria | Unit | Good | Acceptable | Marginal | Poor |
|-----------------------------|-------|--------|------------|-----------|-------|
| Burst strength | (kPa) | > 1000 | 800 - 1000 | 500 - 799 | < 500 |

Individual Burst Strength Results: - The table below shows the burst pressure in kilopascals (kPA) for each sample tested by Zone and the average result for each zone.

Burst pressure for each seam (kPA)

| Area | Sample 1 | Sample 2 | Sample 3 | Sample 4 | Sample 5 | Sample 6 | Average | |
|-------------|----------|----------|----------|----------|----------|----------|---------|---|
| Zones 1 & 2 | 1234 | 1297 | 1382 | 1394 | 1365 | 1350 | 1337 | G |
| Zones 3 & 4 | 1274 | 1411 | 1205 | 1446 | 1444 | 1339 | 1353 | G |



Impact Protection

These pants were tested for impact protection and coverage in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximum force for each impact zone. Areas shaded black are not considered for impact protection ratings.



Impact Protection Performance Impact rating 1/10

Impact score

0.0

| Determining Criteria | Unit | Good | Acceptable | Marginal | Poor* |
|-----------------------------|------|------|------------|----------|-------|
| Impact force | (kN) | < 15 | 15 - 24 | 25 - 30 | > 30 |

^{*} Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

Impact Protector Results: - The table below shows the average and maximum force transmitted through each impact protector type in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone.

| Impact protector type | Knee | | Hip |
|-------------------------------------|------|-------------|-----|
| Average force (kN) | 19.5 | A | P |
| Maximum force (kN) | 23.1 | A | Р |
| Coverage of Zone 1 area | 100% | | 0% |
| Coverage of Zone after displacement | 80% | | 0% |

Individual Impact Protector Results: - The table below shows the test results for each strike on individual impact protectors in kilonewtons (kN) and the position of the strike. Individual strike results are capped at a maximum of 50kN.

Force transfer for each impact strike (kN)

| Impact protector type | Knee | • | | Hip | No impact pro | tector present |
|-----------------------|--------|------|------|--------|---------------|----------------|
| Strike location | Centre | Mid | Edge | Centre | Mid | Edge |
| Impact Protector 1 | 17.5 | 18.9 | 19.0 | | | |
| Impact Protector 2 | 17.2 | 21.3 | 20.1 | | | |
| Impact Protector 3 | 18.5 | 20.3 | 23.1 | | | |



Breathability

These pants were tested for breathability following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

| Without removable I | iners | With | n water-resista | ant liner |
|---------------------------|-------------------------------------|---------------------|------------------|-----------|
| Breathability rating | ** | Brea | thability rating | N/A |
| Breathability score | 0.342 | Breathability score | | N/A |
| Moisture Vapour Resis | stance - R _{et} (kPa.m²/W) | 1 | 2 | Average |
| Without removable liner | S | 46.4 | 49.6 | 48.0 |
| With water-resistant line | er | N/A | N/A | N/A |
| Thermal Resistance - I | R _{ct} (K.m²/W) | 1 | 2 | Average |
| Without removable liner | S | 0.280 | 0.268 | 0.274 |
| With water-resistant line | r | N/A | N/A | N/A |

Water spray and rain resistance

This pants are advertised as water-resistant, and so has been tested for water spray and rain resistance according to the MotoCAP test protocols. The table below shows the water absorbed (ml) and the wetting proportion (%) of the garment and undergarments due to water absorption.

| | Water absorb | ed by garment | Water absorbed by underwear | | |
|---------|--------------|----------------|-----------------------------|----------------|--|
| | Volume (ml) | Percentage (%) | Volume (ml) | Percentage (%) | |
| Pants 1 | 107 | 9% | 4 | 2% | |
| Pants 2 | 121 | 10% | 5 | 2% | |
| Average | 114 | 10% | 5 | 2% | |

Location of wetting

There was no visible wetting to the cotton underwear for either jackets tested.

Assessment Details.

Brand Alpinestars

Model Andes V3 Drystar

Type Pants - Textile

Date purchased 12 September 2022

Tested by AMCAF, Deakin University

Report approved by MotoCAP Chief Scientist

Garment test reference P21T10
Rating first published February 2023
Rating updated 6 February 2023