



## This MotoCAP safety rating applies to:

Brand Rjays Model Tour 2

Type Jacket - Textile
Date purchased 24 March 2025


Sizes tested L and XL
Test garment gender Male
Style Tourer
RRP \$399.95

Test Results Summary	Rating	Score
MotoCAP Protection Rating	**	35.2
Abrasion	1/10	0.72
Burst	10/10	1079
Impact	9/10	69.5
MotoCAP Breathability Rating	+	0.156
Moisture Vapour Resistance	-	120.8
Thermal Resistance	-	0.315
Water resistance	2/10	21.9

This garment is fitted with impact protectors for the elbows and shoulders. A pocket is provided for an aftermarket back protector. There are zipped vents in the chest, sides, arms and back to allow controlled airflow movement through the garment. The breathability rating is based on tests of the garment's materials when all vents are closed. The breathability of this product may be better when the vents are opened. This garment has a removable water-resistant liner. The breathability rating above was achieved with the thermal and water-resistant liners removed. When tested with the water-resistant liner installed, the breathability rating reduced but remained within half a star.

#### **Jacket and Pants - Crash Impact Risk Zones**

This diagram is a pictorial representation of the crash impact risk Zones.

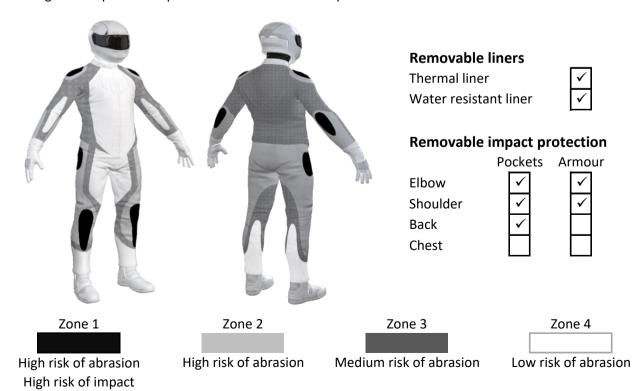



#### **Abrasion Resistance**

The jacket was tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.



#### **Abrasion Resistance Performance**

Abrasion rating	1/10
Abrasion score	0.72

<b>Determining Criteria</b>	Area	Good	Acceptable	Marginal	Poor
High abrasion risk	Zone 1 & 2	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4	>1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

**Individual Abrasion Resistance Results:** - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

#### Abrasion time for each test (seconds)

ioi eacii lest (sec	,uiius j						
Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
100%	0.75	0.91	0.63	0.67	0.73	0.64	0.72
Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
100%	0.75	0.91	0.63	0.67	0.73	0.64	0.72
Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average
100%	0.75	0.91	0.63	0.67	0.73	0.64	0.72
	Coverage (%) 100%  Coverage (%) 100%  Coverage (%)	Coverage (%)         Sample 1           100%         0.75           Coverage (%)         Sample 1           100%         0.75           Coverage (%)         Sample 1	100%       0.75       0.91         Coverage (%)       Sample 1       Sample 2         100%       0.75       0.91         Coverage (%)       Sample 1       Sample 2	Coverage (%)         Sample 1         Sample 2         Sample 3           100%         0.75         0.91         0.63           Coverage (%)         Sample 1         Sample 2         Sample 3           100%         0.75         0.91         0.63           Coverage (%)         Sample 1         Sample 2         Sample 3	Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4           100%         0.75         0.91         0.63         0.67           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4           100%         0.75         0.91         0.63         0.67           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4	Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5           100%         0.75         0.91         0.63         0.67         0.73           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5           100%         0.75         0.91         0.63         0.67         0.73           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5	Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5         Sample 6           100%         0.75         0.91         0.63         0.67         0.73         0.64           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5         Sample 6           100%         0.75         0.91         0.63         0.67         0.73         0.64           Coverage (%)         Sample 1         Sample 2         Sample 3         Sample 4         Sample 5         Sample 6

#### Details of materials used in jacket

Material A Woven fabric shell with mesh inner liner



## **Burst Strength**

The jacket was tested for burst strength in accordance with MotoCAP test protocols. The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table below.



Burst Strength Performance					
Burst rating	10/10				

1079

Burst score

<b>Determining Criteria</b>	Unit	Good	Acceptable	Marginal	Poor
Burst strength	(kPa)	> 1000	800 - 1000	500 - 799	< 500

**Individual Burst Strength Results:** - The table below shows the burst pressure in kilopascals (kPA) for each sample tested by Zone and the average result for each zone.

## Burst pressure for each seam (kPA)

Area	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Zones 1 & 2	990	1100	1054	1194	1064	1229	1105	G
Zones 3 & 4	974	894	780	926	1064	1210	974	Α



#### **Impact Protection**

The jacket was tested for impact protection and coverage in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximum force for each impact zone. Areas shaded black are not considered for impact protection ratings.



# Impact Protection Performance

Impact rating	9/10
Impact score	69.5

<b>Determining Criteria</b>	Unit	Good	Acceptable	Marginal	Poor*
Impact force	(kN)	< 15	15 - 24	25 - 30	> 30

<sup>\*</sup> Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

**Individual Impact Protector Results:** - The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone. Individual strike results are capped at a maximum of 50kN.

Impact protector type	Elbow		Shoulder
Average force (kN)	12.8	G	10.1 <b>G</b>
Maximum force (kN)	16.8	A	12.3 <b>G</b>
Coverage of Zone 1 area	140%	<del></del>	105%
Coverage of Zone after displacement	100%		100%

**Individual Impact Protector Results:** - The table below shows the test results for each strike on individual impact protectors in kilonewtons (kN) and the position of the strike. Individual strike results are capped at a maximum of 50kN.

## Force transfer for each impact strike (kN)

Impact protector type	Elbow			Shoulder			
Strike location	Centre	Mid	Edge	Centre	Mid	Edge	
Impact Protector 1	10.3	12.8	16.8	9.5	10.9	10.0	
Impact Protector 2	11.0	11.3	13.1	9.1	10.2	10.8	
Impact Protector 3	10.7	13.6	16.0	8.6	9.3	12.3	



#### Breathability

The jacket was tested for breathability following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

Without removable	liners	With water-resistant line					
Breathability rating	<del></del>	Brea	thability rating	<b>⅓</b> 0.125			
Breathability score	0.156	Brea	thability score				
Moisture Vapour Resi	stance - R <sub>et</sub> (kPa.m²/W)	1	2	Average			
Without removable lines	°S	122.7	118.9	120.8			
With water-resistant line	er	183.1	191.6	187.4			
Thermal Resistance -	R <sub>ct</sub> (K.m <sup>2</sup> /W)	1	2	Average			
Without removable lines	°S	0.323	0.307	0.315			
With water-resistant line	er	0.377	0.405	0.391			

## Water spray and rain resistance

This jacket is advertised as water-resistant, and so has been tested for water spray and rain resistance according to the MotoCAP test protocols. The table below shows the water absorbed (ml) and the wetting proportion (%) of the garment and undergarments due to water absorption.

	Water absorbed by garment		Water absorbed by underwear			
	Volume (ml)	Percentage (%)	Volume (ml)	Percentage (%)	Water Resistar	nce
Jacket 1	473	27%	51	18%	Performance	
Jacket 2	523	29%	76	26%	Water rating	2/10
Average	498	28%	63	22%	Water Score	21.85

#### **Location of wetting**

There was major wetting to the cotton underwear present at the cuffs of the sleeves for both jackets tested.

Assessment Details			
Brand	Rjays		
Model	Tour 2		
Туре	Jacket - Textile		
Date purchased	24 March 2025		
Tested by	AMCAF, Deakin University		
Report approved by	MotoCAP Chief Scientist		
Garment test reference	J25T22		
Rating first published	May 2025		
Rating updated	14 May 2025		