


**This MotoCAP safety rating applies to:**

**Brand:** Ducati  
**Model:** Speed 3  
**Type:** Jacket - Textile  
**Date purchased:** 29 November 2019  
**Sizes tested:** L and XL  
**Gender:** M  
**Style:** Sports  
**Test code:** J19T28

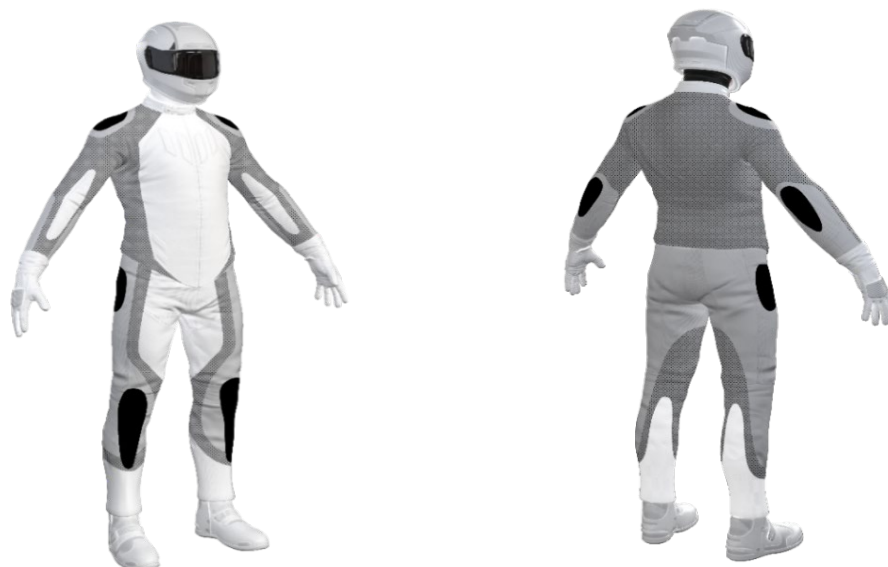
**Test Results Summary:**

	Rating	Score
MotoCAP Protection Rating	★	28.7
Abrasion	1/10	1.00
Burst	10/10	1261
Impact	5/10	37.0
MotoCAP Comfort Rating	★★★	0.472
Moisture Vapour Resistance		29.4
Thermal Resistance		0.232
Water resistance	N/A	N/A

This garment is fitted with impact protectors for the elbows and shoulders. A pocket is provided for an aftermarket back protector. Mesh panels are located in the arms, chest and back to allow airflow movement through the garment.

**Jacket and Pants - Crash Impact Risk Zones**

This diagram is a pictorial representation of the crash impact risk Zones.


**Zone 1**


High risk of abrasion  
High risk of impact

**Zone 2**


High risk of abrasion

**Zone 3**


Medium risk of abrasion

**Zone 4**


Low risk of abrasion

## Abrasion Resistance

The garment was tested for abrasion resistance in accordance with MotoCAP test protocols. The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone.

### Details of materials used in garment:

Material A:	Woven fabric shell, fabric layer and mesh inner liner
Material B:	Woven fabric shell with mesh inner liner
Material C:	Mesh fabric shell with mesh inner liner

Zone	Coverage (%)	Abrasion time for each test (seconds)						Average (seconds)	
		1	2	3	4	5	6		
<b>Zone 1 and 2 areas (High abrasion risk)</b>									
Material A	100%	1.34	0.88	1.63	2.41	1.10	1.07	1.41	M
<b>Zone 3 area (Medium abrasion risk)</b>									
Material B	20%	0.39	0.49	0.42	0.33	0.00	0.00	0.41	P
Material C	80%	0.39	0.26	0.46	0.43	0.33	0.00	0.37	P
<b>Zone 4 area (Low abrasion risk)</b>									
Material B	20%	0.39	0.49	0.42	0.33	0.00	0.00	0.41	M
Material C	80%	0.39	0.26	0.46	0.43	0.33	0.00	0.37	P

Abrasion times are capped at a maximum of 10.00s.

The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table above. The colour coding is based on the worst performing material in each zone.



Determining Criteria		Good	Acceptable	Marginal	Poor
High abrasion risk	Zone 1/2:	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3:	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4:	> 1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

## Burst Strength

The garment's burst strength was tested in accordance with MotoCAP test protocols. The table below shows the burst pressure in kilopascals (kPa) for each sample tested by Zone and the average result for each zone.

Burst pressure (kPa)

Area	1	2	3	4	5	Average	
Zones 1 & 2	1659	1345	1087	1673	914	1336	G
Zone EZ	1541	1319	1233	1236	1058	1277	G
Zones 3 & 4	893	1286	1057	996	1159	1078	G

The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table above.



### Determining Criteria

Burst strength

	Good	Acceptable	Marginal	Poor
(kPa)	> 1000	800 - 1000	500 - 799	< 500

## Impact Protection

The garment was tested for impact protection and coverage in accordance with MotoCAP test protocols. The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone.

Impact protector type	Elbow		Shoulder	
Average force (kN)	24.9	A	22.0	A
Maximum force (kN)	27.1	M	25.4	M
Coverage of zone 1 area	120%		100%	
Coverage of zone after displacement	90%		100%	

### Individual test results

Impact force (kN)	Elbow			Shoulder		
Strike location	A	B	C	A	B	C
Impact Protector 1	23.6	25.6	27.1	18.2	20.6	22.1
Impact Protector 2	22.5	25.2	26.1	20.3	22.8	23.8
Impact Protector 3	23.3	25.0	25.7	21.5	23.0	25.4

The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table above. The colour coding is based on the worst performing score for average or maximum force for each impact zone.



		Good	Acceptable	Marginal	Poor*
Determining Criteria	(kN)	< 15	15 - 24	25 - 30	> 30

\* Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

Areas shaded black are not considered in the impact protection ratings.

### Thermal comfort

The garment was tested for thermal comfort following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

	1	2	Average
Moisture Vapour Resistance - $R_{et}$ ( $kPam^2/W$ )	29.8	29.0	29.4

	1	2	Average
Thermal Resistance - $R_{ct}$ ( $Km^2/W$ )	0.233	0.231	0.232

### Water spray and rain resistance

This garment has not been advertised as water resistant so has not been tested for water spray and rain resistance.