



This MotoCAP safety rating applies to:

Brand:	Five
Model:	RS3 Ladies
Туре:	Glove - Leather/Textile
Date purchased:	22 March 2021
Sizes tested:	L and XL
Test glove gender:	Female
Style:	All Purpose
RRP:	\$59.95


Test Results Summary:

	Rating	Score
MotoCAP Protection Rating	*	1.6
Abrasion	3/10	1.81
Seam strength	1/10	1.5
Impact	3/10	5.9
Water resistance	N/A	N/A

This glove is fitted with impact protectors for the knuckles and palm areas. Mesh fabric in the back of the hand and fingers, provides continuous airflow within the glove.

Gloves - Crash Impact Risk Zones

This diagram is a pictorial representation of the crash impact risk Zones.

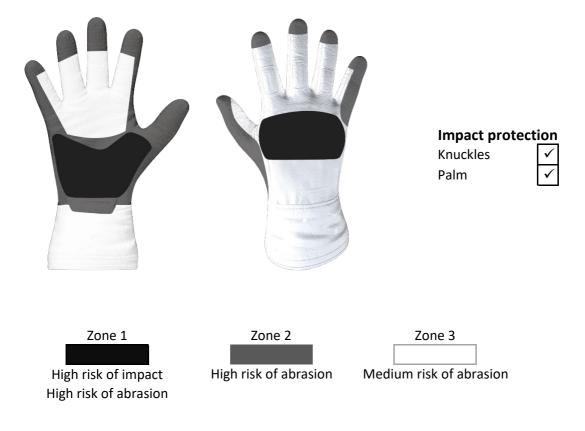



Abrasion Resistance

The gloves were tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each Zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.

						Performance
				Abrasion ra Abrasion so	-	3/10 1.81
Determining Criteria	Area	Good	Acceptable	Marginal	Poor	
High abrasion risk	Zone 1 & 2	> 4.0	2.7 - 4.0	1.2 - 2.6	< 1.2	
Medium abrasion risk	Zone 3	2.5	1.8 - 2.5	0.8 - 1.7	< 0.8	

Individual Abrasion Resistance Results: - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

Abrasion time for each test (seconds)

Zones 1	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material A	60%	10.00	10.00	10.00	10.00	10.00	10.00	10.00	G
Material B	40%	2.18	1.36	1.77	2.65	0.05	1.06	1.51	Μ
Zone 2	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material C	70%	2.07	0.22	2.02	0.60	1.21	0.47	1.10	Ρ
Material D	30%	0.46	0.14	0.04	0.14	0.45	0.59	0.30	Ρ
Zone 3	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material B	30%	2.18	1.36	1.77	2.65	0.05	1.06	1.51	Μ
Material D	70%	0.46	0.14	0.04	0.14	0.45	0.59	0.30	Ρ

Details of materials used in glove - derived from manufacturer provided information

- Material A Hard-shell armour over fabric shell
- Material B Suede patch over suede shell
- Material C Suede shell
- Material D Stretch fabric shell



Seam Tensile Strength

The tensile strength of the gloves seams and glove restraint (the force required to drag off a properly fastened glove) were tested in accordance with MotoCAP test protocols. The diagram below illustrates the tensile strength and wrist restraint results in terms of the likely performance of the glove in a crash and is a pictorial representation of the data from the tables below.



Determining Criteria	Unit	Good	Acceptable	Marginal	Poor
Seam tensile strength	(N/mm)	> 11	9 - 11	6 - 8.9	< 6
Glove restraint	(N)	> 200	100 - 200	50 - 99	<50

Individual Seam Strength Results: - The table below shows the seam tensile strength in newtons per millimeter (N/mm) for each seam tested by Zone and the average result for each Zone.

Seam tensile strength (N/mm) 4 Area 1 2 3 5 Average Zones 1 & 2 6.52 5.19 6.18 6.30 6.44 6.13 Μ Zone 3 8.01 8.69 8.01 5.04 3.23 6.60 Μ

Individual Glove Restraint Results: - The table below shows the force required to remove the restrained glove in newtons (N) for each of the five gloves tested and the average result.

Glove restraint (N	l)	
--------------------	---	---	--

Glove	1	2	3	4	5	Average
Wrist restraint	52.4	71.9	31.0	42.6	42.5	48.1 P



Impact Protection

The glove was tested for impact protection and coverage In accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximium force for each impact zone. Areas shaded black are not considered in the impact protection ratings.



Determining Criteria	Unit	Good	Acceptable	Marginal	Poor
Knuckle Impact force	(kN)	< 2	2 - 4.9	5 - 8	> 8
Palm impact force	(kN)	< 4	4 - 5.9	6 - 8	>8

* Poor may also indicate that no impact protector is present in the glove

Impact Protector Results: - The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and their area of coverage in percentage (%) within the Zone. Impact forces are capped at a maximum of 10.0kN.

Impact protector type	Knuckles	Palm
Average force (kN)	4.4 A	6.2 M
Maximum force (kN)	5.4 M	7.0 M
Coverage of zone 1 area	100%	75%

Individual test results: - The table below shows the test results for each strike on each impact protector in kilonewtons (kN) and the position of the strike. Impact forces are capped at a maximum of 10.0kN.

Impact protector type	Knuckles			Palm	
Strike number	1	2	3	1	2
Impact Protector 1	4.4	4.8	4.9	6.1	5.7
Impact Protector 2	4.7	4.2	3.4	5.8	6.2
Impact Protector 3	5.4	3.9	4.1	6.1	7.0



Water spray and rain resistance

This glove has not been advertised as water resistant so has not been tested for water spray and rain resistance.

Assessment Details.

Brand	Five
Model	RS3 Ladies
Туре	Glove - Leather/Textile
Date purchased	22 March 2021
Tested by	AMCAF, Deakin University
Report approved by	MotoCAP Chief Scientist
Garment test reference	G20L23
Rating first published	September 2021
Rating updated	14 September 2021